MODEL: LSS24038A75FTT.V3* L/R

*ALL ACCESSORIES OPTIONAL

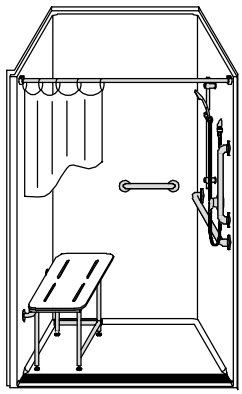

PERSPECTIVE VIEW - N.T.S.
MODEL SHOWN HERE AS:
RIGHT PLUMBING
LEFT SEAT
LEFT REVEAL

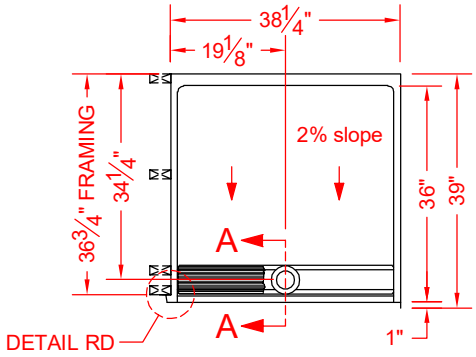

TOP VIEW - SCALE 3/8" = 1'-0"

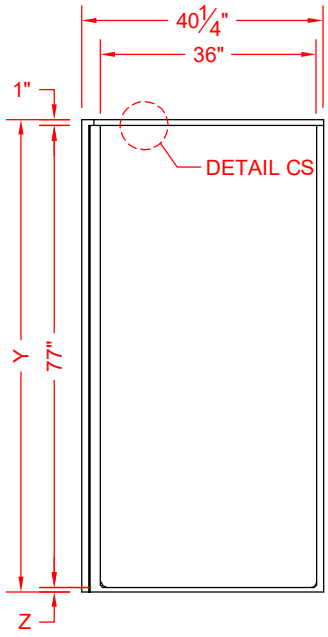

FRONT ELEVATION - SCALE: 3/8" = 1'-0"

ADA COMPLIANT

SEE OVER

Features:

-ADA compliant transfer shower with trench drain and stainless steel grate (included)
-Molded one-piece gelcoat/fiberglassshower module
-"Smooth" wall finish, white (standard)
-Integral full wood backing for strength and unlimited accessory placement
-Available in various threshold heights
-On all threshold heights 1-1/4" or shorter, no mud set is required, but an adhesive kit is supplied
-On all threshold heights 1-1/2" or taller, no mud set is required

*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST

MODEL #	UNIT HEIGHT Y	THRESHOLD HEIGHT Z*
LSS24038A75FTT.V3	78-3/4"	3/4" MIN
LSS24038A2FTT.V3	80"	2" MAX

*** - SEE BACK FOR DETAIL SECTIONS**

PRODUCT SPECIFICATIONS:

-Single-piece shower module shall be constructed of gelcoat/fiberglass with full integral plywood backing and have a stainless steel trench drain grate.
- Rough-In: Stud opening +1/4" – 0" Nominal Dimensions

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

PRODUCT INFORMATION:

- Accessories: Factory installed, unless prone to damage during installation/shipping. Polished chrome/satin stainless standard, others available. (not applicable to pans/bases)
- Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors
-Custom curb heights, other than shown, are available (between min. and max.)

OPTIONAL ACCESSORIES:

INSTALLED AT FACTORY:
-Seat, folding
-Grab bar
-Soap dish
-Mixing valve, pressure-balancing, lever handle, pre-plumbed tree to supply elbow
-Curtain rod brackets

INSTALLED BY OTHERS:
-Curtain and rod
-Flange-Window trim kits
-T-shaped WaterStopper kit
-Trench grate and No-caulk brass drain (INCLUDED)

CODES:

Designed and manufactured in compliance with the following standards and codes:
-A.N.S.I. Z124.2 Standards for Plastic Showers
-I.P.C. International Plumbing Code
-A.D.A. Accessibility Guildelines for Buildings and Facilities
-A.N.S.I. A117.1 Accessible and Usable Buildings and Facilities
-U.P.C. Uniform Plumbing Code

NOTICE OF LIMITATION:

-Recess as needed to meet code
-Reveal not recommended on common wall
-Recess as needed for trench, see page 2

bestbath Intelligent Designs

We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

☐ LSS24038A75FTT.V3

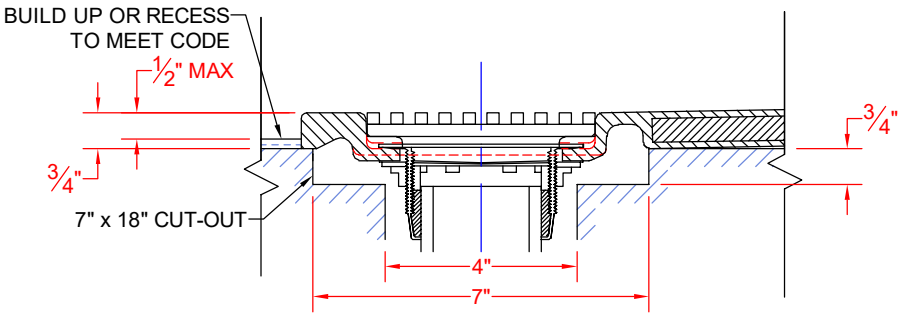

SECTION A-A - SCALE: 3" = 1'-0"

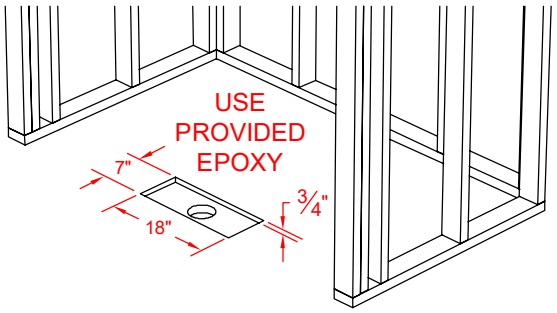

FOR MODELS ENDING IN A75FT*.V3,
INSTALLATION REQUIRES A 7" x 18" x ¾" CUT-OUT.

☐ LSS24038A2FTT.V3

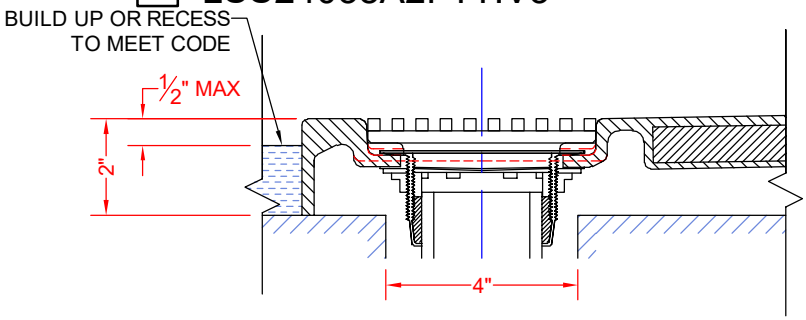

SECTION A-A - SCALE: 3" = 1'-0"

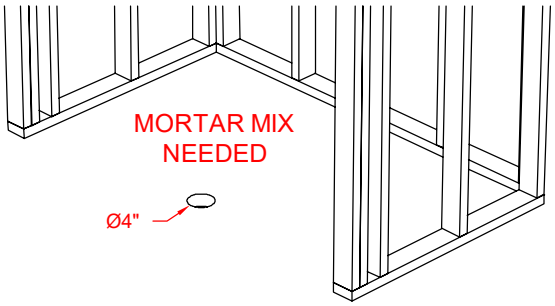

FOR MODELS ENDING IN A15FT*.V3, A17FT*.V3, OR A2FT*.V3,
INSTALLATION REQUIRES A 4" DRAIN HOLE.

****OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST****

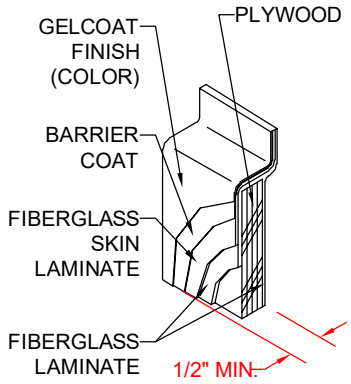

DETAIL CS - SCALE: N.T.S.
CROSS SECTION DETAIL

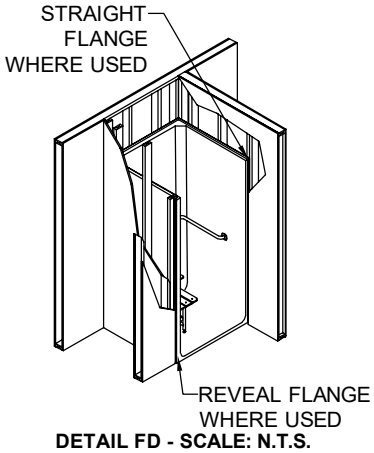

DETAIL FD - SCALE: N.T.S.
FRAMING DETAIL

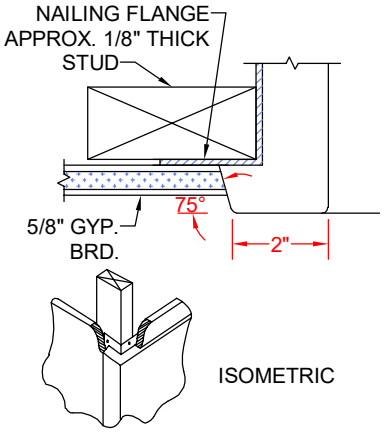

DETAIL RD - SCALE: N.T.S.
REVEAL DETAIL