




TILE RECESS REQUEST FORM: 5LES6036/B/E



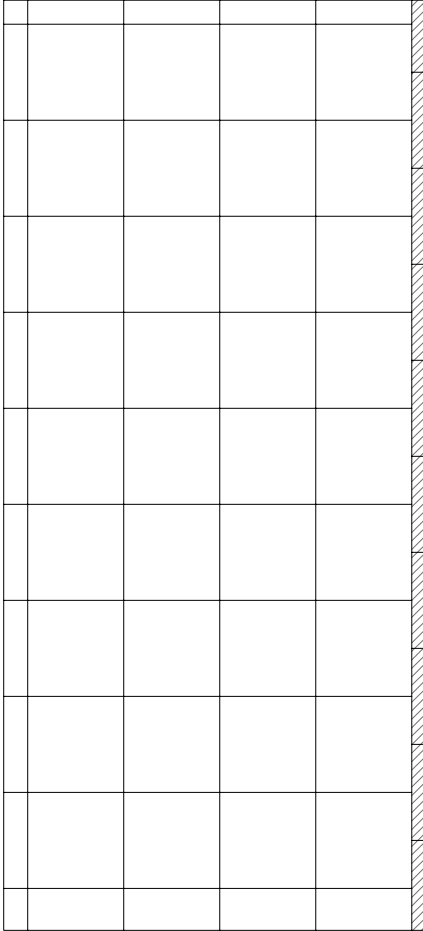

LEFT WALL

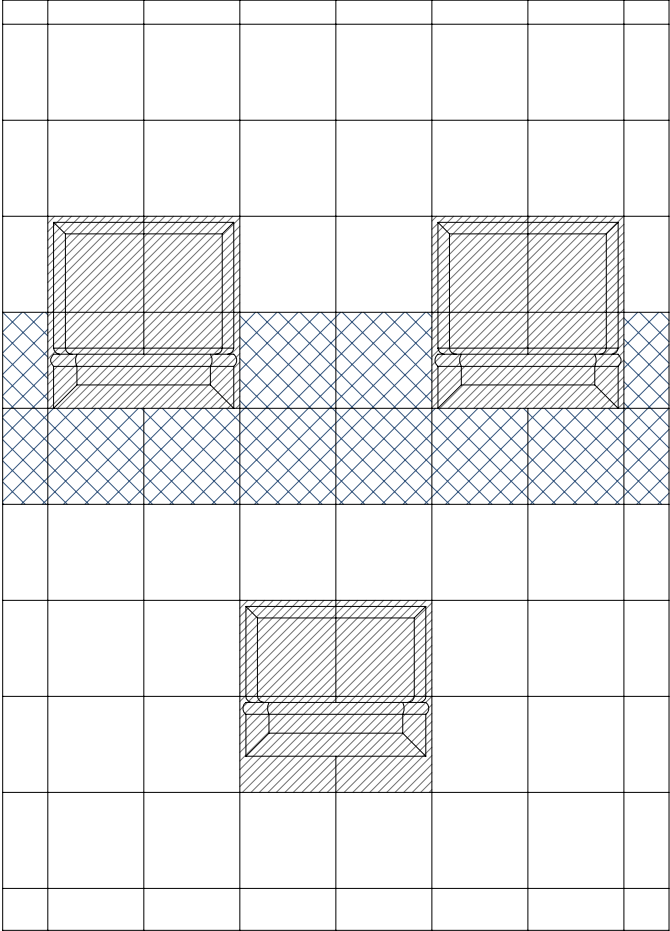

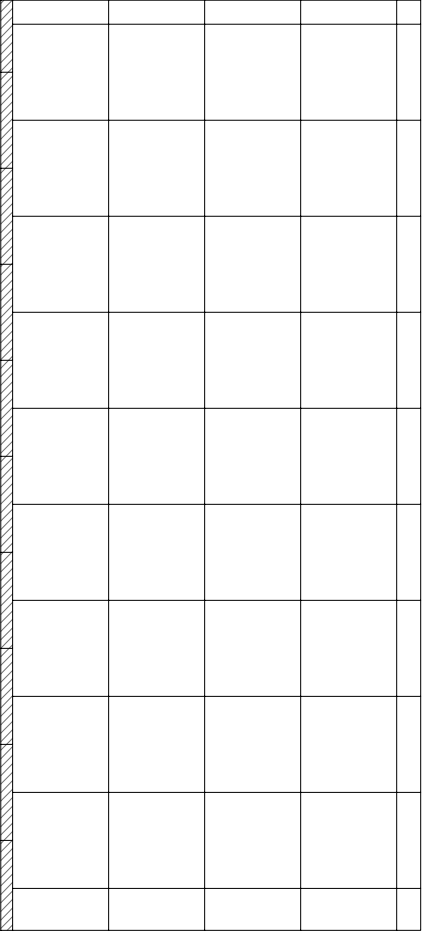BACK WALL



RIGHT WALL

-  This area cannot be modified to accommodate recess for tiles
-  The strip along the seam between the two back walls cannot be fully recessed

1. Mark the tiles to be modified to accommodate inset tile. Notice: the shaded tiles are not available for inset tile modifications.
2. Circle a thickness for the tile that you plan to use:

1/4" 3/8" 1/2" 5/8" 3/4"

3. Purchase order # for this unit _____
 or customer name for this unit _____

NOTE: Recessing tiles at the front and top edges will leave an exposed tile edge. This edge can either be treated with grout, or a bullnose tile can be used.

